

BRCS120P03ZC

Rev.B Sep.-2024

描述 / Descriptions

PDFN5×6 封装 P 沟道场效应管。
P-Channel MOSFET in a PDFN5×6 Plastic Package.


特征 / Features

$V_{DS} (V) = -30V$ $I_D = -46A (V_{GS} = \pm 20V)$
 $R_{DS(ON)} @ -10V \leq 12m\Omega (Typ. 10.5m\Omega)$
 $R_{DS(ON)} @ -4.5V \leq 18m\Omega (Typ. 16.5m\Omega)$
 无卤产品。HF Product.


用途 / Applications

负载开关、适配器开关、笔记本电脑。
Load switch, Adaptor switch, Notebook PC.

内部等效电路 / Equivalent Circuit



引脚排列 / Pinning

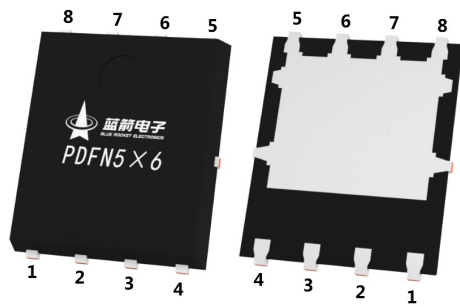

PIN1、2、3: S PIN4: G PIN5、6、7、8: D

Pin	极性
1	S
2	S
3	S
4	G
5	D
6	D
7	D
8	D

印章代码 / Marking

见印章说明。
See Marking Instructions.

极限参数 / Absolute Maximum Ratings($T_a=25^\circ\text{C}$)

参数 Parameter		符号 Symbol	数值 Rating	单位 Unit
Drain-Source Voltage		V_{DSS}	-30	V
Drain Current		$I_D(T_c=25^\circ\text{C})$	-24	A
Drain Current - Pulsed		I_{DM}	-127	A
Gate-Source Voltage		V_{GS}	± 20	V
Avalanche Current		I_{AS}	17	A
Single Pulsed Avalanche Energy		E_{AS}	151	mJ
Power Dissipation		$P_D(T_c=25^\circ\text{C})$	38	W
Operating and Storage Temperature Range		T_J, T_{stg}	-55 to 150	$^\circ\text{C}$
Junction-to-Ambient	$t \leq 10$	$R_{\theta JA}$	25	$^\circ\text{C/W}$
Junction-to-Ambient	Steady-State		55	
Junction-to-Case	Steady-State	$R_{\theta JC}$	3.3	

电性能参数 / Electrical Characteristics(Ta=25°C)

参数 Parameter	符号 Symbol	测试条件 Test Conditions	最小值 Min	典型值 Typ	最大值 Max	单位 Unit
Drain-Source Breakdown Voltage	BV_{DSS}	$I_D=-250\mu A$ $V_{GS}=0V$	-30	-36		V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=-30V$ $V_{GS}=0V$			-1	μA
Gate-Body leakage current	I_{GSS}	$V_{DS}=0V$ $V_{GS}=\pm 20V$			± 100	nA
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}$, $I_D=-250\mu A$	-1.0	-1.7	-2.5	V
Static Drain-Source On-Resistance	$R_{DS(ON)}$	$V_{GS}=-10V$ $I_D=-20A$		10.5	12	m Ω
		$V_{GS}=-4.5V$ $I_D=-10A$		16.5	18	
Diode Forward Voltage	V_{SD}	$I_S=-1A$ $V_{GS}=0V$			-1.2	V
Gate resistance	R_g	$V_{GS}=0V$ $V_{DS}=0V$ $f=1MHz$		7.5	10	Ω
Input Capacitance	C_{iss}	$V_{GS}=0V$ $V_{DS}=-25V$ $f=1MHz$		2100		pF
Output Capacitance	C_{oss}			340		
Reverse Transfer Capacitance	C_{rss}			210		
Total Gate Charge	$Q_g(10V)$	$V_{GS}=-10V$ $V_{DS}=-15V$ $I_D=-17A$		35		nC
Total Gate Charge	$Q_g(4.5V)$			17		
Gate-Source Charge	Q_{gs}			5.7		
Gate-Drain Charge	Q_{gd}			8.8		
Turn-on Delay Time	$t_{d(ON)}$	$V_{GS}=-10V$ $V_{DS}=-15V$ $R_L=0.9\Omega$ $R_{GEN}=3\Omega$		11		ns
Turn-on Rise Time	t_r			7.5		
Turn-off Delay Time	$t_{d(OFF)}$			43.5		
Turn-off Fall Time	t_f			17.5		

电参数曲线图 / Electrical Characteristic Curve

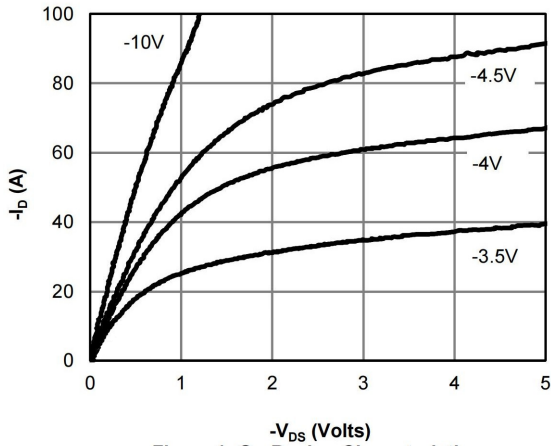


Figure 1: On-Region Characteristics

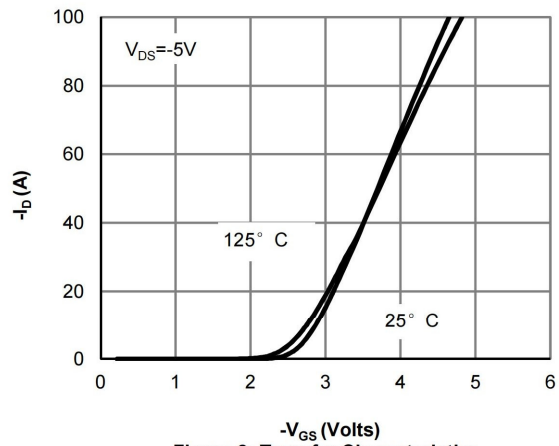


Figure 2: Transfer Characteristics

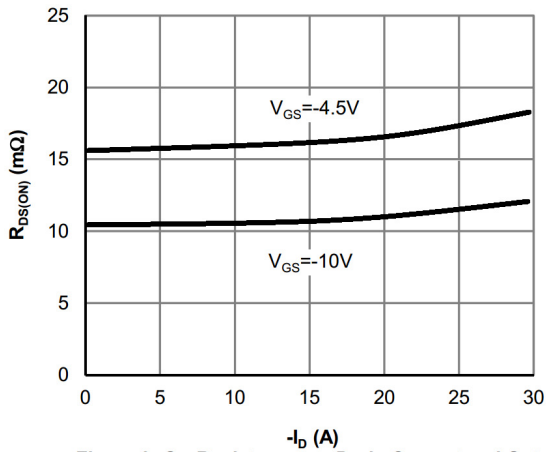


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

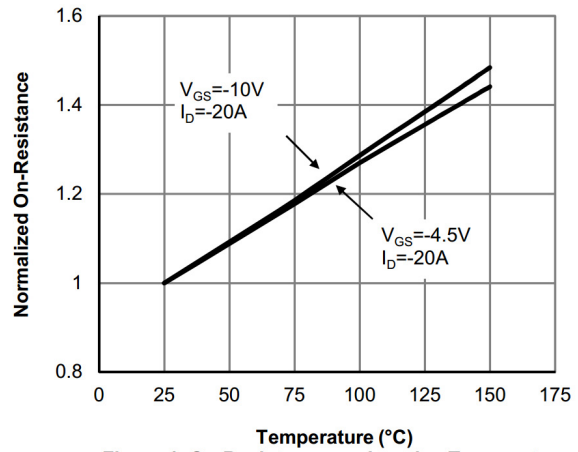


Figure 4: On-Resistance vs. Junction Temperature

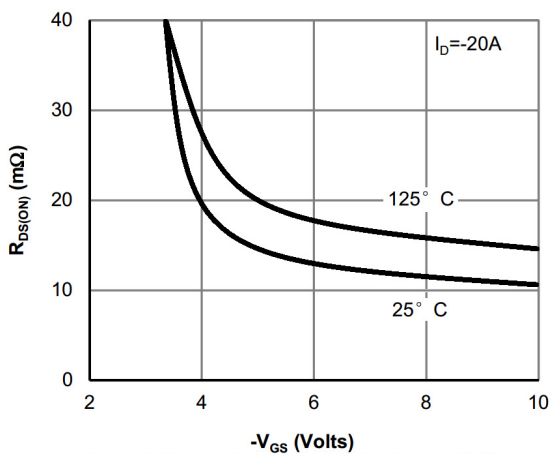


Figure 5: On-Resistance vs. Gate-Source Voltage (Note E)

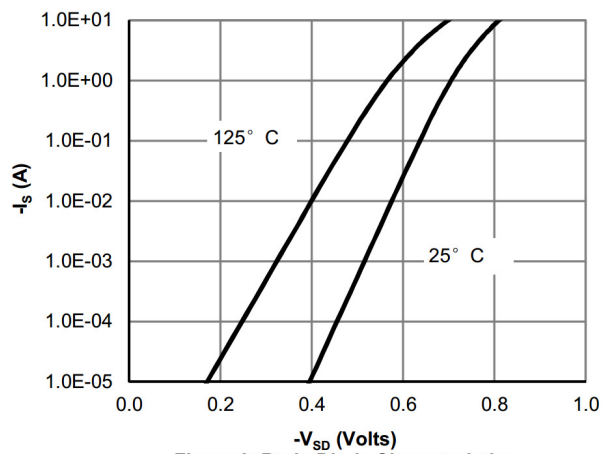


Figure 6: Body-Diode Characteristics (Note E)

电参数曲线图 / Electrical Characteristic Curve

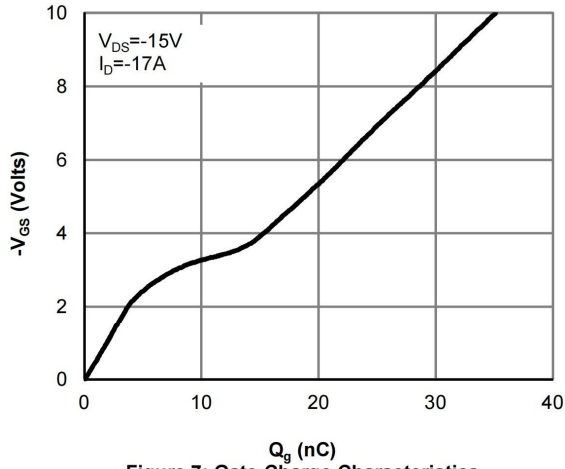


Figure 7: Gate-Charge Characteristics

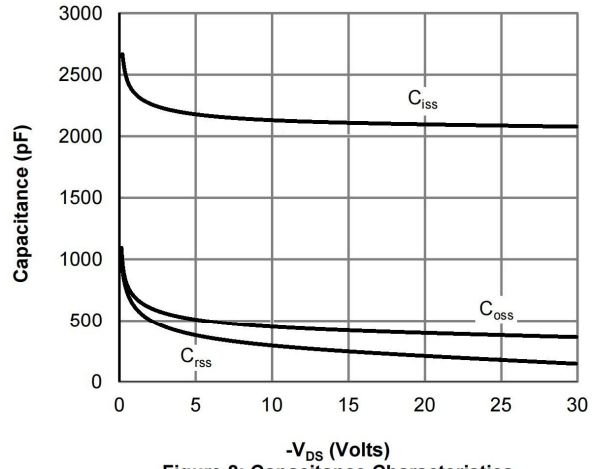


Figure 8: Capacitance Characteristics

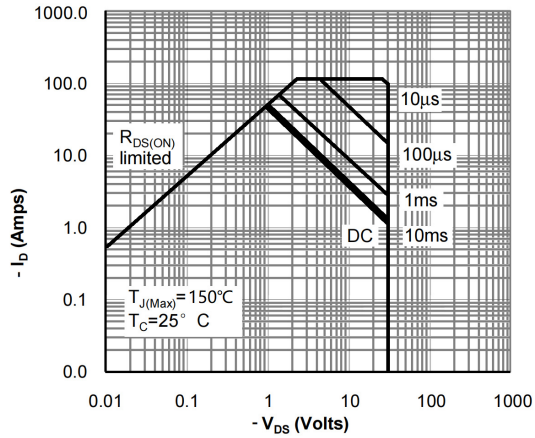


Figure 9 : Maximum Forward Biased Safe Operating Area


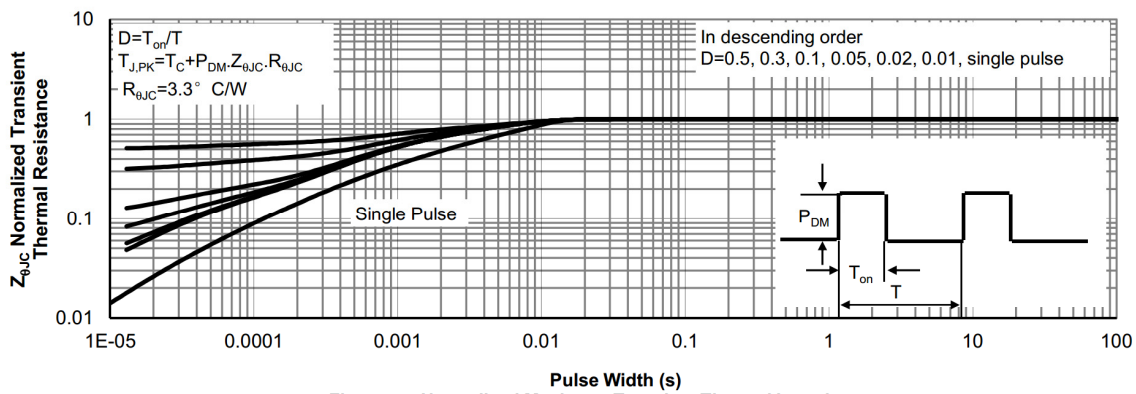


Figure 10: Normalized Maximum Transient Thermal Impedance

外形尺寸图 / Package Dimensions


PDFN5×6

Unit:mm

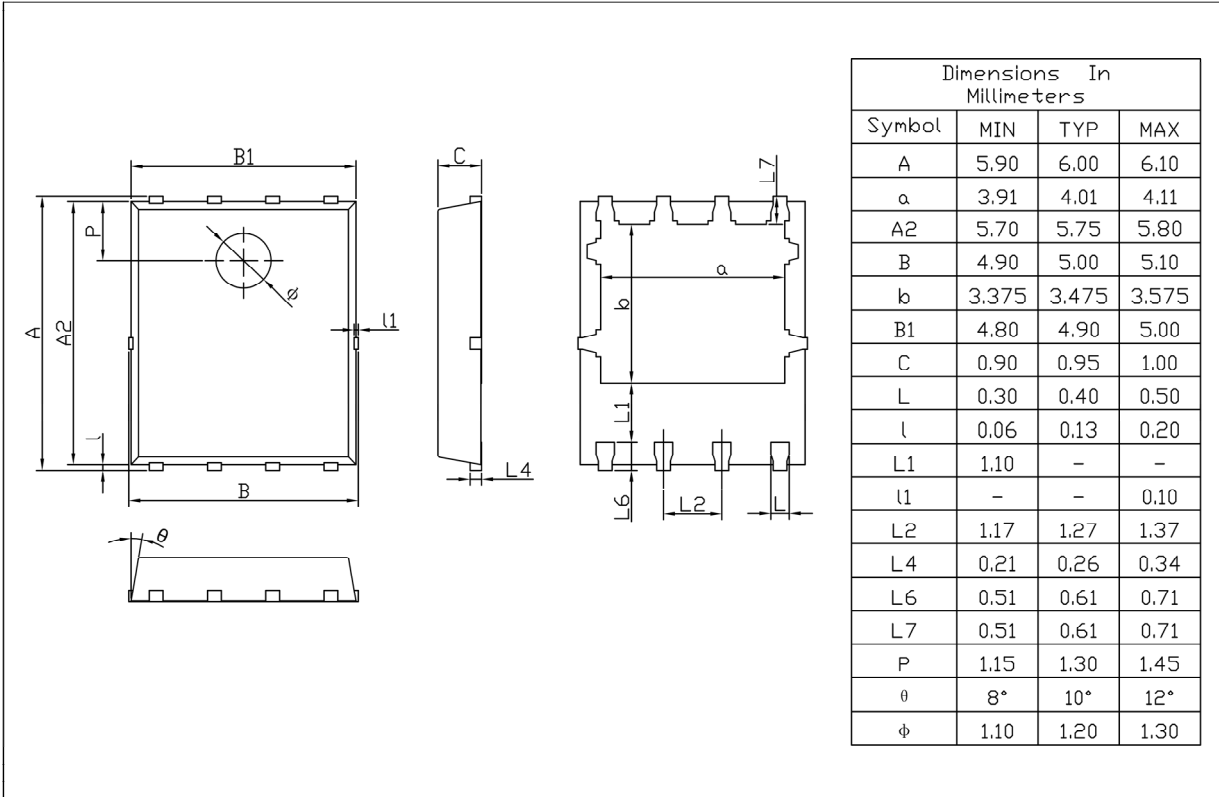

Rev.01 202209

印章说明 / Marking Instructions

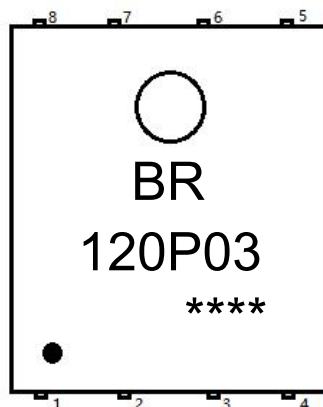

说明：

BR： 为公司代码

120P03： 为产品型号

****： 为生产批号代码，随生产批号变化


Note：

BR： Company Code

120P03： Product Type Code

****： Lot No. Code, code change with Lot No

回流焊温度曲线图(无铅) / Temperature Profile for IR Reflow Soldering(Pb-Free)

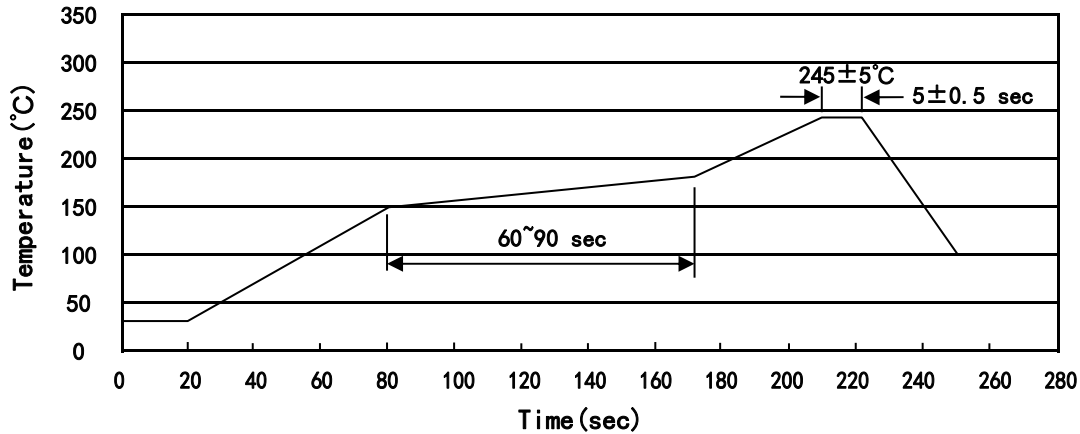

说明：

- 1、预热温度 150~180°C，时间 60~90sec;
- 2、峰值温度 245±5°C，时间持续为 5±0.5sec;
- 3、焊接制程冷却速度为 2~10°C/sec.

Note:

- 1.Preheating:150~180°C, Time:60~90sec.
- 2.Peak Temp.:245±5°C, Duration:5±0.5sec.
3. Cooling Speed: 2~10°C/sec.

耐焊接热试验条件 / Resistance to Soldering Heat Test Conditions

温度：260±5°C

时间：10±1 sec.

Temp.:260±5°C

Time:10±1 sec

包装规格 / Packaging SPEC.

卷盘包装 / REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
PDFN5×6	5,000	2	10,000	6	60,000	13"×12	360×360×50	380×335×366

使用说明 / Notices