

BRMUR860AC

Rev.G Oct.-2017

描述 / Descriptions

TO-220AC 塑封封装 超快恢复二极管。
Ultrafast Recovery Diode in a TO-220AC Plastic Package.

特征 / Features


极快的恢复时间，采用 TO-220AC 封装，极低的正向压降，极小的反向漏电流，600V 耐压。
Ultrafast recovery time, popular TO-220AC package, low forward voltage, low leakage current, reverse voltage to 600V.

用途 / Applications


该产品可用于高频脉宽调制电路中的输出整流和续流，因其具有反向恢复电荷少恢复时间快的特点，所以能明显减少电路的开关损耗。

These devices are intended for output rectifiers and flywheel diodes in a variety of high-frequency pulse-width modulated switching regulators. Their low stored charge and attendant fast reverse-recovery behavior minimize electrical noise generation and in many circuits markedly reduce the turn-on dissipation of associated power switching transistors.

内部等效电路 / Equivalent Circuit



引脚排列 / Pinning



PIN1、2 : Cathode

PIN 3 : Anode

放大及印章代码 / h_{FE} Classifications & Marking

见印章说明。 See Marking Instructions








极限参数 / Absolute Maximum Ratings(Ta=25°C)

参数 Parameter	符号 Symbol	数值 Rating	单位 Unit
Peak Repetitive Reverse Voltage	V_{RRM}	600	V
Working Peak Reverse Voltage	V_{RWM}	600	V
DC Blocking Voltage	V_R	600	V
Average Forward Current	I_F	8	A
Non Repetitive Peak Surge Current	I_{FRM}	16	A
Peak forward surge current	I_{FSM}	100	A
Power Dissipation	$P_{C(Tc=25^{\circ}C)}$	75	W
Junction Temperature Range	T_j	150	°C
Storage Temperature Range	T_{stg}	-55~150	°C

电性能参数 / Electrical Characteristics(Ta=25°C)

参数 Parameter	符号 Symbol	测试条件 Test Conditions	最小值 Min	典型值 Typ	最大值 Max	单位 Unit
Forward Voltage	V_F	$I_F=8A$			1.5	V
		$I_F=8A$ $T_C=150^{\circ}C$			1.2	V
Instantaneous Reverse Current	I_R	$V_R=600V$			100	μA
		$V_R=600V$ $T_C=150^{\circ}C$			500	μA
Reverse Recovery Time	t_{rr}	$I_F=1A$ $dIF/dt=200A/\mu S$			60	ns
		$I_F=8A$ $dIF/dt=200A/\mu S$			70	ns
Time To Reach Peak Reverse forward current	t_a	$I_F=8A$ $dIF/dt=200A/\mu S$		32		ns
Time From Peak IRM Projected zero crossing of IRM based on a straight line peak through 25%	t_b	$I_F=8A$ $dIF/dt=200A/\mu S$		21		ns
Reverse Recovery change	Q_{RR}	$I_F=8A$ $dIF/dt=200A/\mu S$		195		nC
Junction Capacitance	C_J	$V_R=10V$ $I_F=0A$		25		pF


电参数曲线图 / Electrical Characteristic Curve

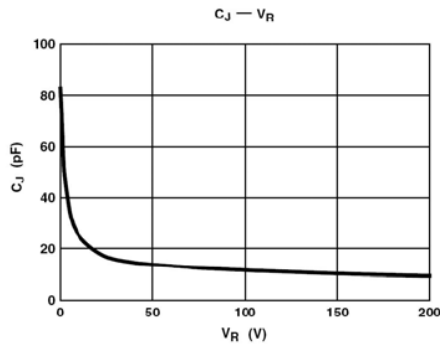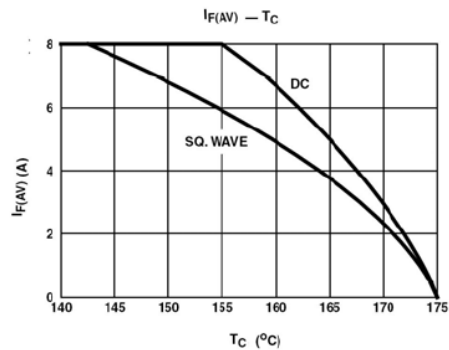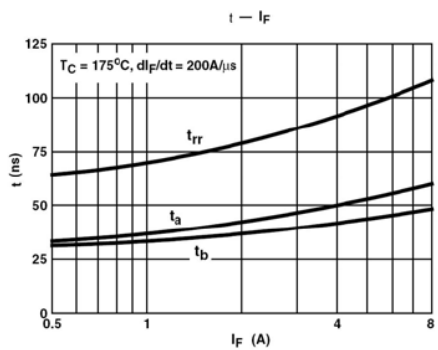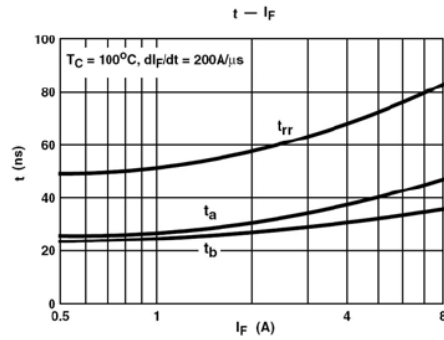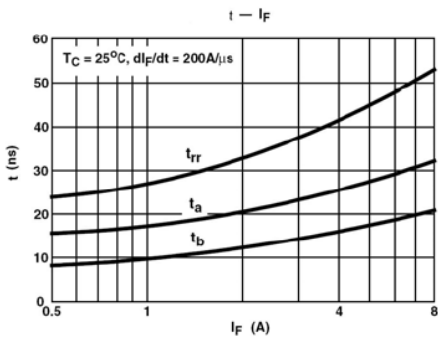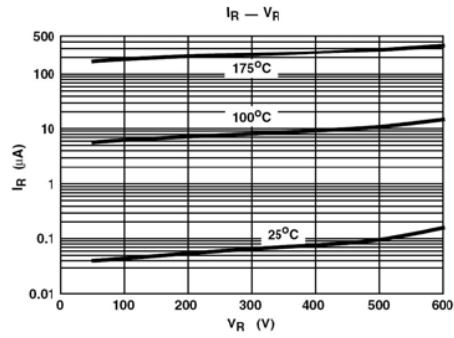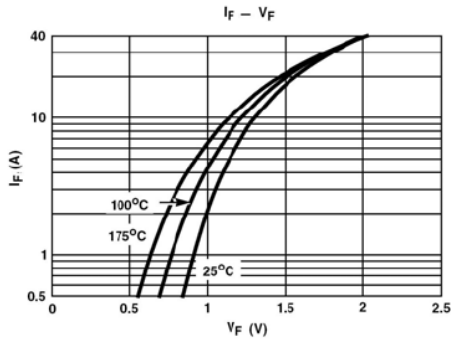

外形尺寸图 / Package Dimensions


TO-220AC

Unit:mm

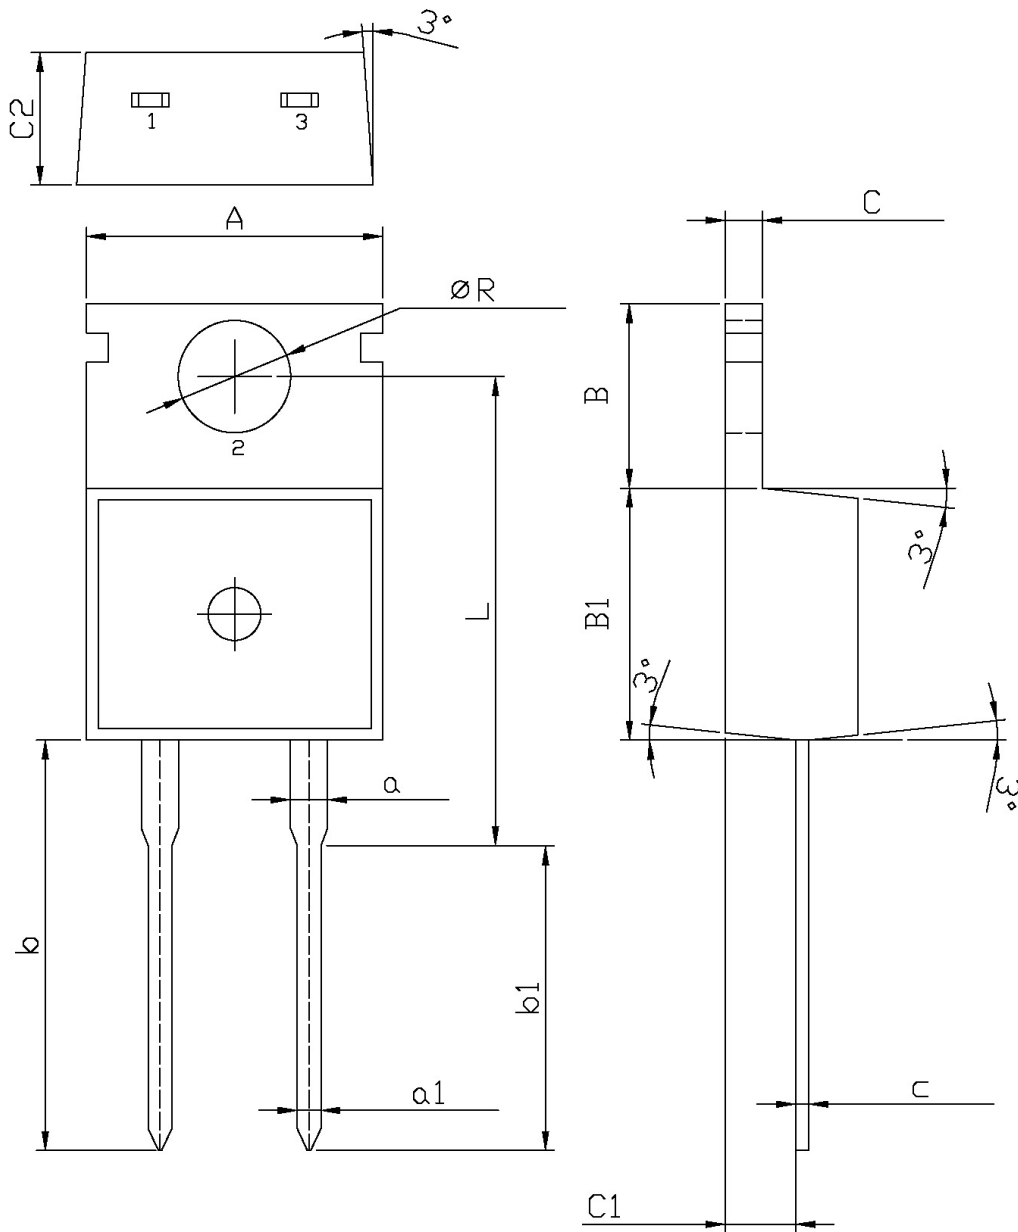

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
A	9.8	10.2	B	6.3	6.7
R	3.56	3.64	B1	9.0	9.4
L	15.7	16.1	C1	2.2	2.6
b	12.6	13.6	C	1.2	1.4
b1	9.6	10.6	c	0.4	0.6
a	1.22	1.32	C2	4.3	4.7
a1	0.7	0.9			

印章说明 / Marking Instructions

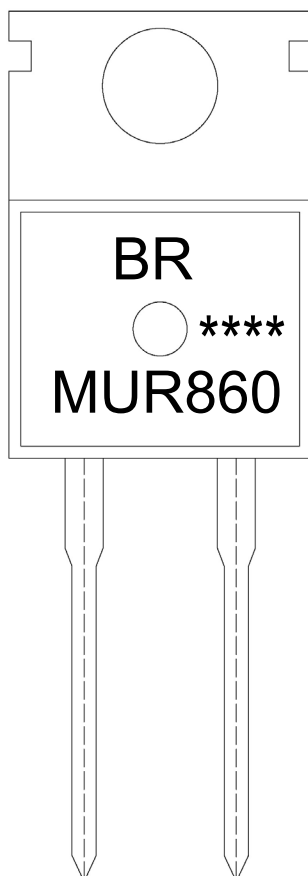

说明：

BR： 为公司代码

MUR860： 为型产品号

****： 为生产批号代码，随生产批号变化。

Note:

BR: Company Code

MUR860 : Product Type.

****: Lot No. Code, code change with Lot No.

波峰焊温度曲线图(无铅) / Temperature Profile for Dip Soldering(Pb-Free)



说明：

- 1、预热温度 25 ~ 150°C，时间 60 ~ 90sec;
- 2、峰值温度 255±5°C，时间持续为 5±0.5sec;
- 3、焊接制程冷却速度为 2 ~ 10°C/sec.

Note:

- 1.Preheating:25~150°C, Time:60~90sec.
- 2.Peak Temp.:255±5°C, Duration:5±0.5sec.
3. Cooling Speed: 2~10°C/sec.

耐焊接热试验条件 / Resistance to Soldering Heat Test Conditions

温度：270±5°C

时间：10±1 sec.

Temp.:270±5°C

Time:10±1 sec

包装规格 / Packaging SPEC.

散件包装 / BULK

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Bag 只/袋	Bags/Inner Box 袋/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Bag 袋	Inner Box 盒	Outer Box 箱
TO-220/F/AC	200	10	2,000	5	10,000	135×190	237×172×102	560×245×195

套管包装 / TUBE

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Tube 只/套管	Tubes/Inner Box 套管/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Tube 套管	Inner Box 盒	Outer Box 箱
TO-220/F/AC	50	20	1,000	5	5,000	532×31.4×5.5	555×164×50	575×290×180

使用说明 / Notices